




Unified Threat Management

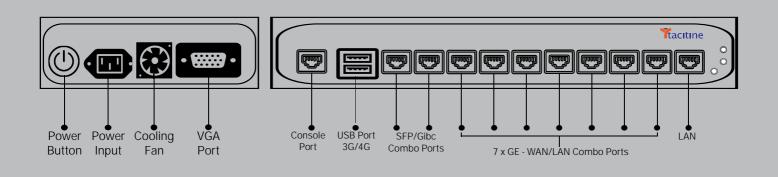

EN6200-Prime is designed keeping in mind the requirement of pay as you grow model which is most required for the current market conditions.

Compared to the other product's Tacitine moved one step ahead of

Compared to the other product's Tacitine moved one step ahead of providing a comprehensive solutions to meet customer IT needs on seamless failover between the private cloud and alternate Internet connection, secure branch connectivity with 100% uptime and remote manageability coupled with 2x scalability.

EN6200 Prime's scalability feature ensures 60% saving on capex cost on new UTM purchase when the organization grows 2x on their user numbers.

Tacitine UTM's inbuilt logs and elaborated reports on every configured features make EN6200 Prime not just a UTM box, instead it is informative, proactive on security breaches, easy to use and provides complete control of the network.

In addition to UTM features, Prime Series are equipped with AAA Hotspot features for individual user control on both wired and wireless network.

Prime Series supports 3G/4G dongles and hotspot along with multiple wired internet connections for auto failover and load balancing.


EN6200 Prime Series are versatile, scalable, robust and rack mountable.

Higher
Throughput
More
Ports
With
Security
And

Scalable

Users



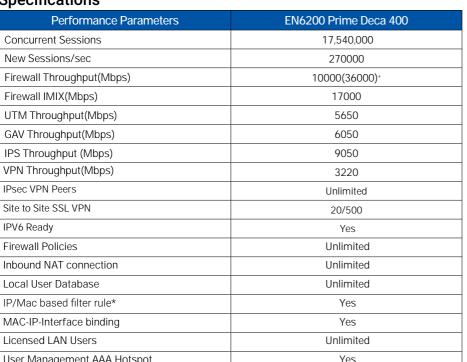

Osci Management / WWT Totspot	103
Hardware Specification	
Gigabit Ethernet Ports	1xLAN + 9xLAN/WAN
RAM DDR3	4GB
Storage (S=SSD, H=HDD)(D=Default,O=Optional,R=On Request)	32GB(s)(D)/500GB(H)(R)/64GB(s)(O)
USB / VGA Port	2/1 Port
Form Factor	1U
Dimensions (mm) - (HxWxD)	44x430x360
Weight (Kg)	4.9
Color	Grey
Power Supply	230 AC 3-Pin
Input Voltage	100-240V/50-60Hz
Consumption	90W
Total Heat Dissipation (BTU)	250
Operating Temperature	0-45 degree C
Storage Temperature	2-70 degree C
Relative Humidity (NC)	10 to 90%
Regulatory Compliance	FCC Part 15, Class B, CE

Features

- Router
- Multi LAN/WAN connection

Ttacitine

- Scalable Users
- Auto Load Balancer
- Auto Fail Over
- SPI Firewall
- Geo IP Filter
- Web Security
- Content Filter
- Email Security
- Gateway Level Antivirus
- Intrusion Prevention System
- Intrusion Detection System
- AAA User Management
- VPN SSL/IPSec
- Quality of Service
- DDNS/SNMP/Remote sys log
- Traffic Analyzer
- Inbuilt Logs & Reports

Ordering Information

EN6200-Prime Deca-400-H-Y

10 Port device includes AV/CF/AS/IDS/IPS/AAA/HW Warranty subscription upto 500 concurrent users with "H" Varient and "Y" Support.

- H = Hotspot Variants Options: Default Hotspot(DHS), Office Hotspot (OHS), Hospitality Hotspot (HHS), Educational Hotspot(EHS).
- Y = Subscription years options: 1 Year or 3 Years

Tacitine Assured Support

Tacitine products come with direct OEM 24/7 support by trained Professionals for product configuration and support. TAS helps customer on security best practices to make the network hacker free and more reliable.



Tacitine Consulting Pvt Ltd,

6/1, 1st Main,

Behind Kodava Samaj, Vasanth Nagar, Bangalore - 560 052. India | USA | Middle East | South East Asia

^{1.}Maximum throughout performance is measured under ideal test conditions using industry standard performance test tools, 2. Firewall UDP throughout performance is based on RFC 2544 guidelines. 3.All Performance values are upto or rough guideline only and configuration. 3. IPS throughput(http) measured using default IPS rule set and 512KB object size. 4.VPN throughput measured using multiple tunnels with 512KB response size. 5. Testing done with multiple flows through