


Unified Threat Management

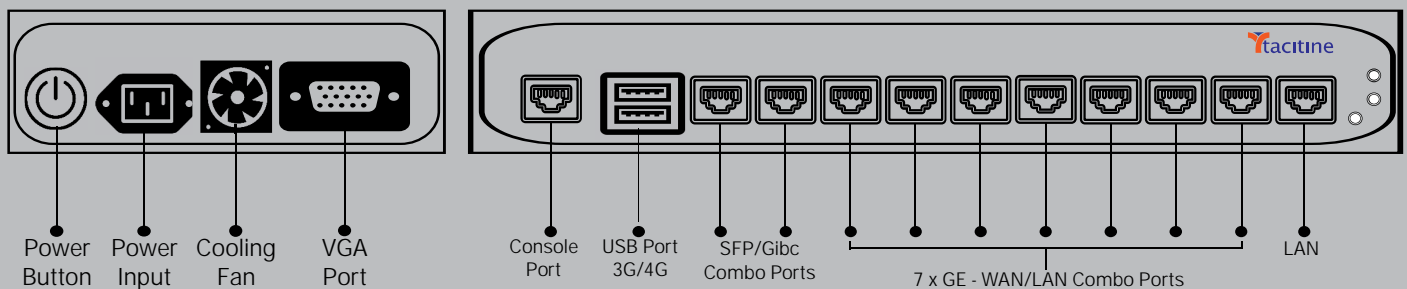

Higher
Throughput
More
Ports
With
Security
And
Scalable
Users

EN6200-Prime is designed keeping in mind the requirement of pay as you grow model which is most required for the current market conditions.

Compared to the other product's Tacitine moved one step ahead of providing a comprehensive solutions to meet customer IT needs on seamless failover between the private cloud and alternate Internet connection, secure branch connectivity with 100% uptime and remote manageability coupled with 2x scalability.

EN6200 Prime's scalability feature ensures 60% saving on capex cost on new UTM purchase when the organization grows 2x on their user numbers.

Tacitine UTM's inbuilt logs and elaborated reports on every configured features make EN6200 Prime not just a UTM box, instead it is informative, proactive on security breaches, easy to use and provides complete control of the network.

In addition to UTM features, Prime Series are equipped with AAA Hotspot features for individual user control on both wired and wireless network.

Prime Series supports 3G/4G dongles and hotspot along with multiple wired internet connections for auto failover and load balancing.

EN6200 Prime Series are versatile, scalable, robust and rack mountable.

Specifications

PerformanceParameters	EN6200 Prime Deca 500
ConcurrentSessions	21,100,000
NewSessions/sec	262000
FirewallThroughput(Mbps)	10000(36000)*
FirewallIMIX(Mbps)	16800
UTMThroughput(Mbps)	5600
GAVThroughput(Mbps)	6000
IPSThroughput(Mbps)	9000
VPNThroughput(Mbps)	3220
IPsecVPNPeers	Unlimited
SiteToSiteSSLVPN	20/500
IPv6Ready	Yes
FirewallPolicies	Unlimited
InboundNATconnection	Unlimited
LocalUserDatabase	Unlimited
IP/Macbasedfilterrule*	Yes
MAC-IP-Interfacebinding	Yes
LicensedLANUsers	Unlimited
UserManagementAAAHotspot	Yes
HardwareSpecification	
GigabitEthernetPorts	1xLAN+9xLAN/WAN
RAMDDR3	4GB
Storage (S=SSD, H=HDD)(D=Default, O=Optional, R=On Request)	32GB(S)(D)/500GB(H)(R)/64GB(S)(O)
USB/VGAPort	2/1Port
FormFactor	1U
Dimensions(mm)-(HxWxD)	44x430x360
Weight(Kg)	4.9
Color	Grey
PowerSupply	230AC3-Pin
InputVoltage	100-240V/50-60Hz
Consumption	100W
TotalHeatDissipation(BTU)	260
OperatingTemperature	0-45degreeC
StorageTemperature	2-70degreeC
RelativeHumidity(NC)	10to90%
RegulatoryCompliance	FCCPart15,ClassB,CE

All specification and photos are subject to change without prior notice.

1.Maximum throughput performance is measured under ideal test conditions using industry standard performance test tools. 2. Firewall UDP throughput performance is based on RFC 2544 guidelines. 3.All Performance values are upto or rough guideline only and vary depending on system configuration. 3. IPS throughput(http) measured using default IPS rule set and 512KB object size. 4.VPN throughput measured using multiple tunnels with 512KB response size. 5.Testing done with multiple flows through multiple port pairs.

Ordering Information

EN6200-Prime Deca-500-H-Y	10 Port device includes AV/CF/AS/IDS/IPS/AAA/HW Warranty subscription upto 600 concurrent users with 'H' Variant and 'Y' Support.
H = Hotspot Variants Options: Default Hotspot(DHS), Office Hotspot (OHS), Hospitality Hotspot (HHS), Educational Hotspot(EHS).	
Y = Subscription years options : 1 Year or 3 Years	

Tacitine Assured Support

Tacitine products come with direct OEM 24/7 support by trained Professionals for product configuration and support. TAS helps customer on security best practices to make the network hacker free and more reliable.



www.tacitine.com

Features

- Router
- Multi LAN/WAN connection
- Scalable Users
- Auto Load Balancer
- Auto Fail Over
- SPI Firewall
- Geo IP Filter
- Web Security
- Content Filter
- Email Security
- Gateway Level Antivirus
- Intrusion Prevention System
- Intrusion Detection System
- AAA User Management
- VPN - SSL/IPSec
- Quality of Service
- DDNS/SNMP/Remote sys log
- Traffic Analyzer
- Inbuilt Logs & Reports

Tacitine Consulting Pvt Ltd,

6/1, 1st Main,

Behind Kodava Samaj, Vasanth Nagar,

Bangalore – 560 052.

India | USA | Middle East | South East Asia