


# Unified Threat Management

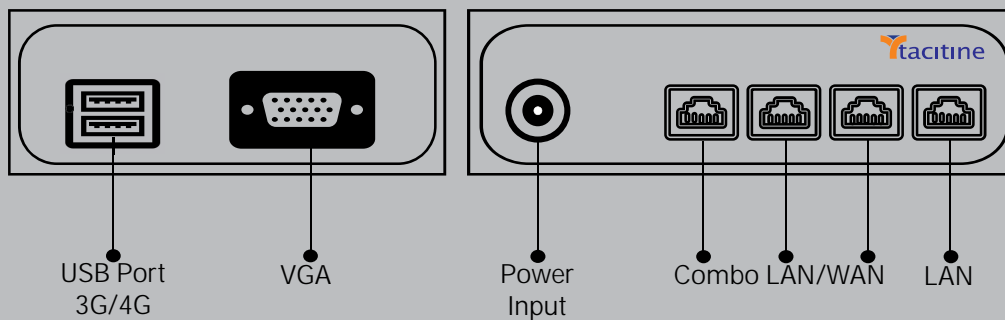

Modern  
Day  
UTM  
For  
Every  
Office

In today's world, Cyber threats are same for all types of modern business. Hence, the firewall used in SOHO, SME & Corporate segments should also support features like enterprise class firewall to protect the network and need to be available at an affordable price. EN6200-Q series meets the above requirement with excellent ROI coupled with world class features.

Q Series comes with built in AAA User Management Hotspot functionalities for both wired and wireless users. Feature also helps to provide secure Internet access to guest.

Q Series is designed with Drop In Placement (DIP) feature to provide seamless failover between MPLS over SSL VPN on ADSL connection without modifying the existing network.

With detailed built in logs and reports on every designed feature, Q Series ensure UTM is no more just a box but very friendly, proactive and easy to use product.

Q Series UTM's are compact, fanless, more reliable, low power consumption and can be placed in office without any much special arrangement.

## Specifications

Performance Parameters	EN6200 Q 35
Concurrent Sessions	6,000,000
New Sessions/sec	35000
Firewall Throughput(Mbps)	4000
Firewall IMIX(Mbps)	2000
UTM Throughput(Mbps)	1000
GAV Throughput(Mbps)	600
IPS Throughput (Mbps)	1250
VPN Throughput(Mbps)	500
IPsec VPN Peers	Unlimited
Site to Site SSL VPN	2/200
IPV6 Ready	Yes
Firewall Policies	Unlimited
Inbound NAT connection	Unlimited
Local User Database	Unlimited
IP/Mac based filter rule*	Yes
MAC-IP-Interface binding	Yes
Licensed LAN Users	Unlimited
User Management AAA Hotspot	Yes
Hardware Specification	
Gigabit Ethernet Ports	1xLAN + 3xLAN/WAN Combo
RAM DDR3	2GB
Storage SSD	32GB
USB / VGA Port	2/1 Port
Form Factor	Desktop
Dimensions (mm) - (HxWxD)	30x124x160
Weight (Kg)	2.2
Color	Black
Power Supply	12V/5A
Input Voltage	100-240V/50-60Hz
Consumption	10W
Total Heat Dissipation (BTU)	110
Operating Temperature	0-45°C
Storage Temperature	2-70°C
Relative Humidity (NC)	10 to 90%
Regulatory Compliance	FCC Part 15, Class B, CE

# All specification and photos are subject to change without prior notice.

1.Maximum throughput performance is measured under ideal test conditions using industry standard performance test tools. 2. Firewall UDP throughput performance is based on RFC 2544 guidelines. 3.All Performance values are upto or rough guideline only and vary depending on system configuration. 3. IPS throughput(http) measured using default IPS rule set and 512KB object size. 4.VPN throughput measured using multiple tunnels with 512KB response size. 5.Testing done with multiple flows through multiple port pairs. \* If all slots populated.

## Ordering Information

EN6200- Q-35-H-Y	4 Port device includes AV/CF/AS/IDS/IPS/AAA/HW Warranty subscription upto 50 concurrent users with "H" Variant and "Y" Support.
H = Hotspot Variants Options: Default Hotspot(DHS), Office Hotspot (OHS), Hospitality Hotspot (HHS), Educational Hotspot(EHS).	
Y = Subscription years options : 1 Year or 3 Years	

## Tacitine Assured Support

Tacitine products come with direct OEM 24/7 support by trained Professionals for product configuration and support. TAS helps customer on security best practices to make the network hacker free and more reliable.



[www.tacitine.com](http://www.tacitine.com)

## Features

- Router
- Multi LAN/WAN connection
- Scalable Users
- Auto Load Balancer
- Auto Fail Over
- SPI Firewall
- Geo IP Filter
- Web Security
- Content Filter
- Email Security
- Gateway Level Antivirus
- Intrusion Prevention System
- Intrusion Detection System
- AAA User Management
- VPN - SSL/IPSec
- Quality of Service
- DDNS/SNMP/Remote sys log
- Traffic Analyzer
- Inbuilt Logs & Reports

Tacitine Consulting Pvt Ltd,

6/1, 1st Main,

Behind Kodava Samaj, Vasanth Nagar,

Bangalore – 560 052.

India | USA | Middle East | South East Asia